

The mission requires orientation of the antennas to approximate local vertical, with no requirement for yaw stability. A motorized boom provides the necessary inertia configuration for gravity-gradient stabilization. Energy dissipation for stability is provided by four passive magnetic hysteresis rods, one in each solar panel spar. Passive gravity-gradient stabilization such as this has been demonstrated on numerous spacecraft. Energy dissipation to assure stability will be provided by two passive ball-in-tube nutation dampers. Attitude knowledge is required to perform the maneuvers necessary for the stabilization adjustment phase. This is provided by a three-axis vector magnetometer and digital sun sensors. Magnetometer and sun sensor data are telemetered and ground processing enables attitude determination.

The STARNET component spacecraft will have a design lifetime of 5 years. Lifetime is determined by a number of factors including component failures, aging effects, and fuel depletion.

The power subsystem will have sufficient battery capacity to power the spacecraft during periods of solar eclipse lasting up to approximately 45 minutes. Details of the specific power subsystem design will be available when the spacecraft contractor has been selected during the competitive procurement phase.

#### G. Emission Limitations

Given the use of spread spectrum techniques and the fact that STARNET is a low earth orbit system, however, it is expected that the level of spurious emissions will be negligible. Applicant will minimize any spurious emission anomalies.

#### H. Dates by which construction will be commenced and completed, launch date, and estimated date of placement into service.

The complete constellation of twenty-four (24) STARNET in-orbit component spacecraft will be launched within forty-eight (48) months after Commission approval. Component spacecraft will be designed and quality controlled twelve (12) months after program inception. Delivery of STARNET component spacecraft will commence twenty-four (24) months after Commission approval. Manufacturers are to deliver three (3) component spacecraft per quarter over (8) quarters. Spacecraft integration on the launcher is four (4) months for the first launch, and one (1) month for subsequent launches.

Launches will be conducted at a rate of three (3) every quarter. The launch period will start in the fourth quarter of 1993 and continue into the third quarter of 1995, assuming Commission approval in the second quarter of 1991.

- I. The STARSYS application sets forth the public interest considerations, and the legal, financial, and technical qualifications of the Applicant. All information contained in the STARSYS application that is pertinent to this Application, but that may not be reproduced herein, is hereby incorporated by reference.
- J. STARSYS waives any claim to the use of any particular frequency or of the ether as against the regulatory power of the United States because of the previous use of the same, whether by license or otherwise, and requests construction authority in accordance with this Application. All statements made in the attached exhibits are a material part hereof, and are incorporated herein as if set out in full in this Application.
- K. The undersigned certifies for STARSYS that the statements made in this Application are true, complete, and correct to the best of his knowledge and belief, and are made in good faith.

WHEREFORE, STARSYS respectfully requests the Commission to grant this Application.

Respectfully submitted,

STARSYS, INC.

By: /S/ Ashok Kaveeshwar  
Dr. Ashok Kaveeshwar  
President


Date: May 4, 1990

**TABLE 1**

STARNET component spacecraft will operate on a Modified Primary Basis in the U.S. in the following VHF bands:

**Nominally using spread spectrum techniques (Solution A)**


|                           |     |    |           |
|---------------------------|-----|----|-----------|
| Earth to space (uplink)   | 148 | to | 149.0 MHz |
| Space to earth (downlink) | 137 | to | 138.0 MHz |

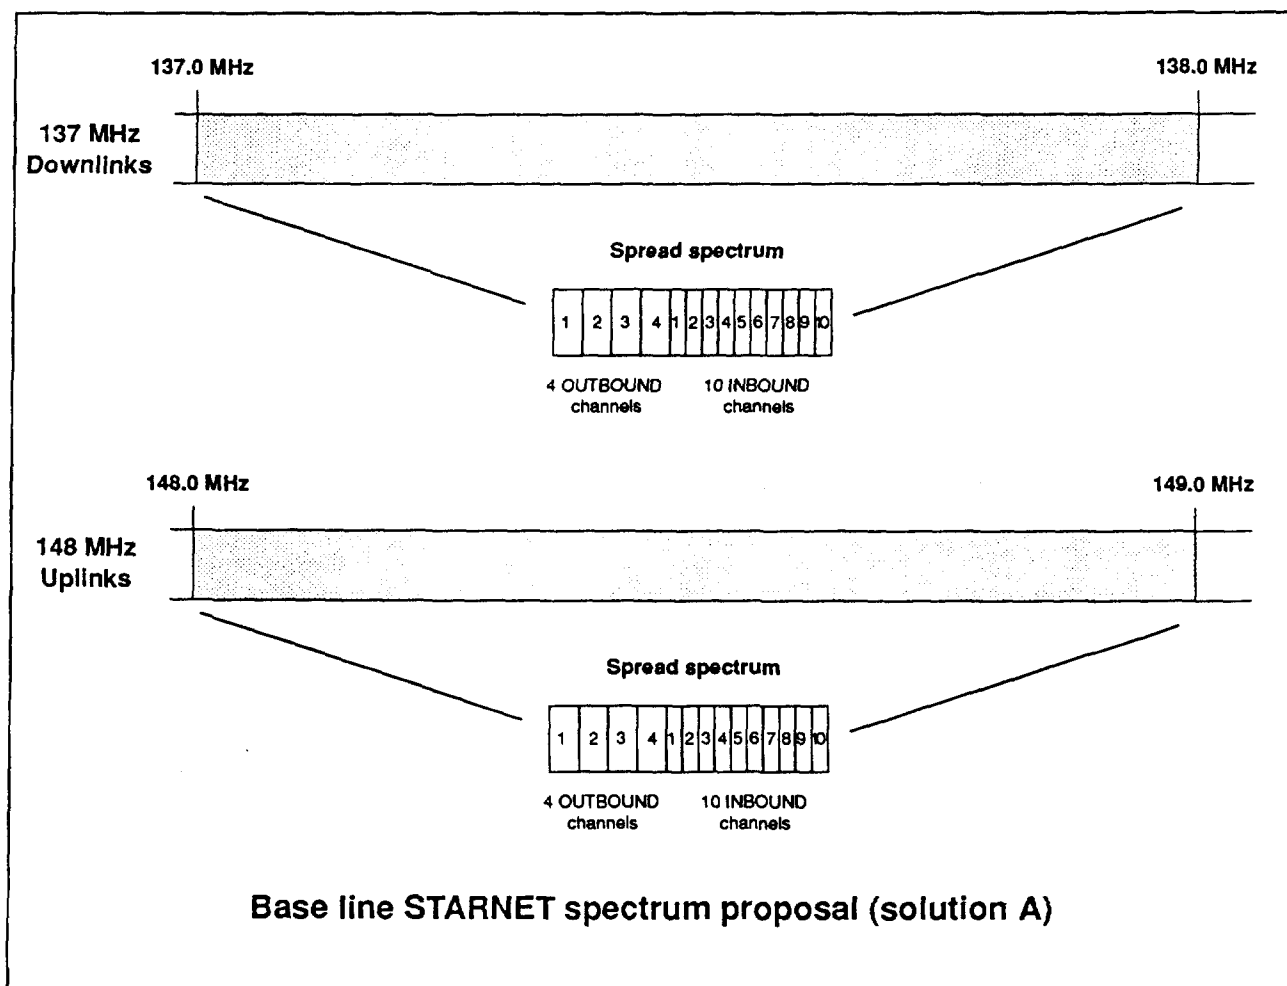

**TABLE 2**

**Or alternatively without using spread spectrum techniques  
(Solution B)**

|                           |     |    |             |
|---------------------------|-----|----|-------------|
| Earth to space (uplink)   | 148 | to | 148.411 MHz |
| Space to earth (downlink) | 137 | to | 137.509 MHz |

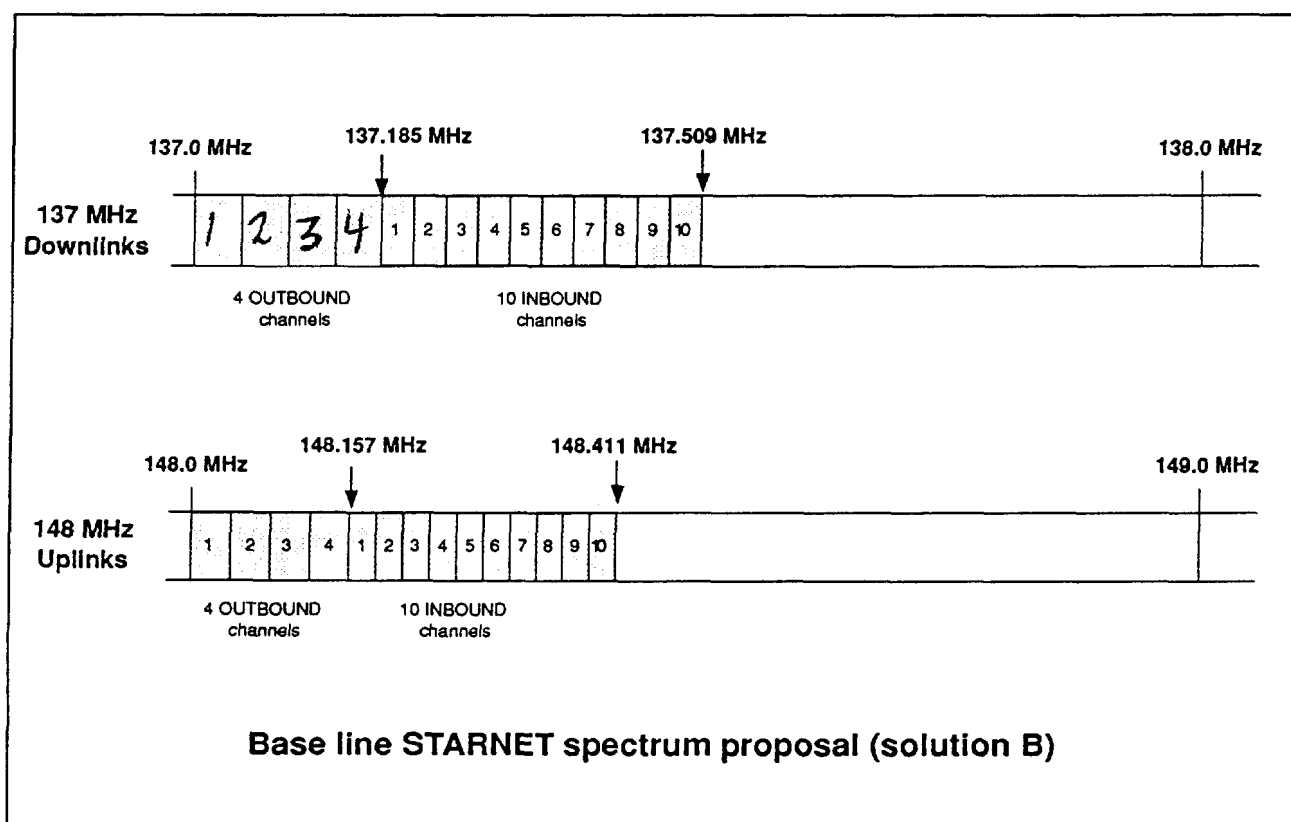

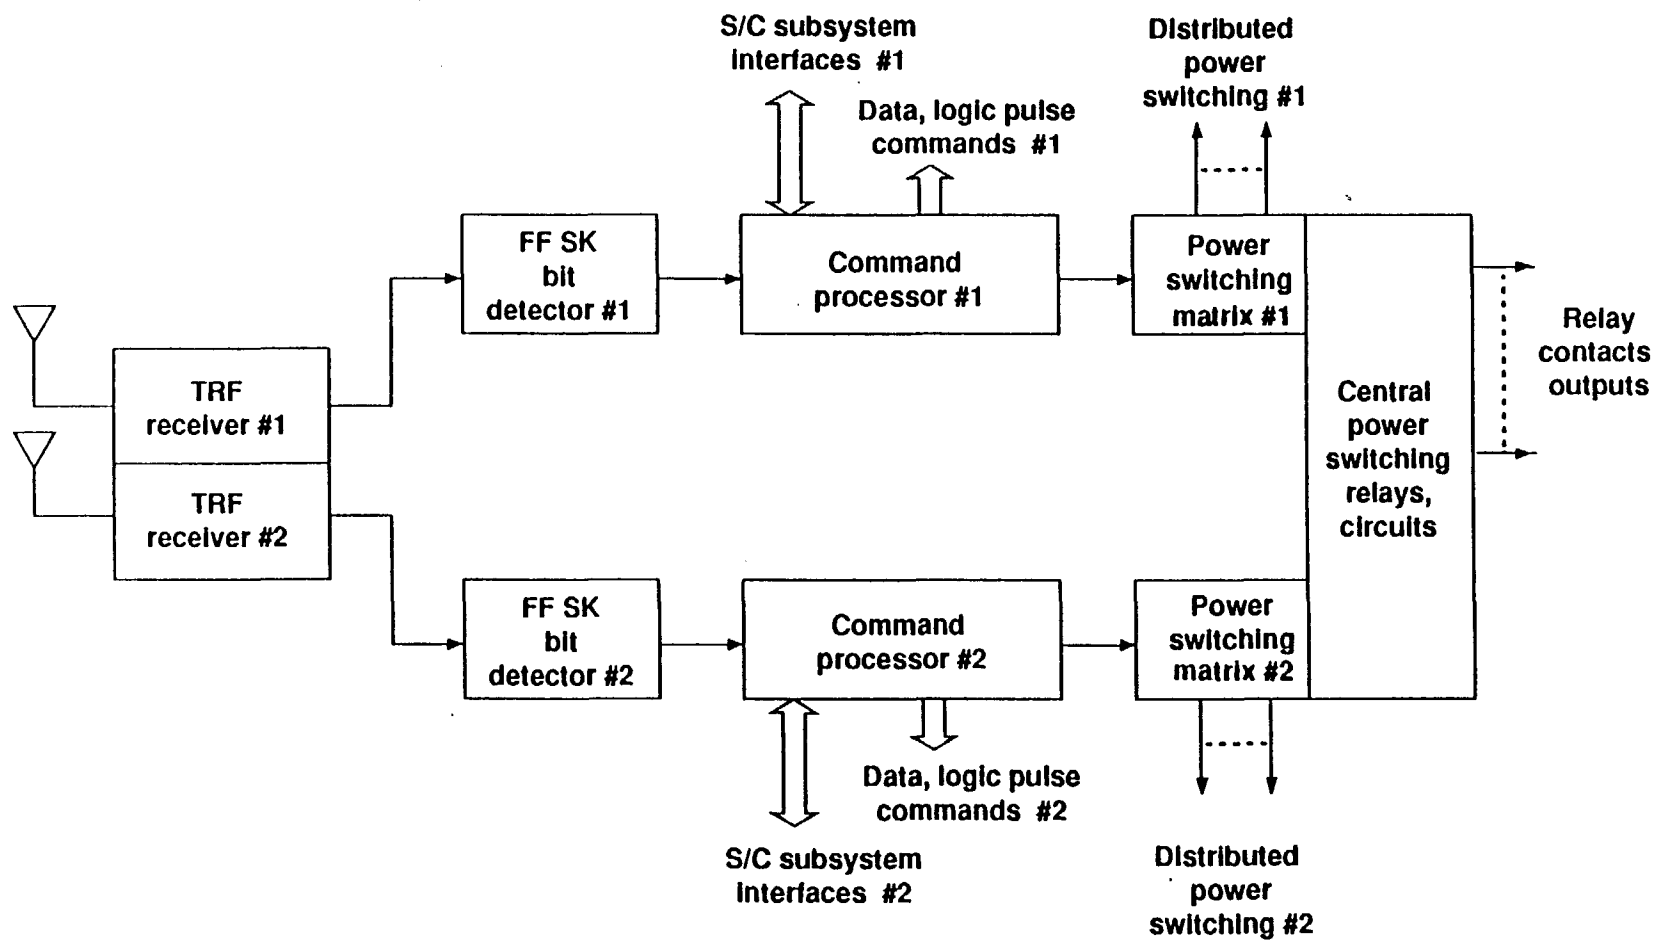


Figure 1

Before the  
FEDERAL COMMUNICATIONS COMMISSION  
Washington, D.C. 20554

|  |   |                |
|--|---|----------------|
| In the Matter of the Application of    | ) |                |
|  | ) |                |
| STARSYS, INC.                          | ) | File No. _____ |
|  | ) |                |
| For Authority to Construct a Low Earth | ) |                |
| Orbit Communications Satellite to be   | ) |                |
| Stationed in an Inclined               | ) |                |
| Non-Geostationary Orbit                | ) |                |

APPLICATION

STARSYS, Inc. ("STARSYS" or "Applicant"), pursuant to Sections 308, 309, and 319 of the Communications Act of 1934, as amended, hereby applies for authority to construct a low earth orbit communications satellite ("STARNET F6") that will operate in the 137-138 MHz frequency band for Space-to-Earth transmissions, and in the 148-149 MHz band for Earth-to-Space transmissions, or in sub-bands thereof, depending on frequency modulation selected by the Commission. STARSYS requests the Commission to allow STARNET F6 to be randomly deployed in a low earth, non-geostationary inclined orbit between 50 and 60 degrees.

The satellite for which construction authority is requested herein is an integral component of the STARNET system that is being developed by STARSYS. STARNET F6 is one of 24 in-orbit components of the STARNET system for which STARSYS is requesting Commission construction approval.

A. Applicant is:

STARSYS, Inc.  
2000 K Street, N.W.  
Suite 620  
Washington, D.C. 20006

B. Correspondence concerning this application may be addressed to:

Dr. Ashok Kaveeshwar  
President  
STARSYS, Inc.  
2000 K Street, N.W.  
Suite 620  
Washington, D.C. 20006

With a copy for Counsel:

Raul R. Rodriguez  
Stephen D. Baruch  
Leventhal, Senter & Lerman  
2000 K Street, N.W.  
Suite 600  
Washington, D.C. 20006-1809

C. The radio frequency plan is set forth in Tables 1 and 2.

TT&C frequency assignments are intraband.

VHF band frequencies (using spread spectrum techniques) are:

Earth-to-Space (Uplink) 148 to 149.0 MHz

Space-to-Earth (Downlink) 137 to 138.0 MHz

(In the event that a non-spread spectrum basis is selected by the Commission, the STARNET component spacecraft will operate in sub-bands of these frequencies.)

D. Applicant requests authority to deploy this component of the STARNET system in an inclined (between 50 degrees and 60 degrees), non-geostationary, low earth orbit. A discussion of the factors influencing the orbit selection process is included in Part VII of the STARSYS application.

E. The STARNET system component's receive antenna gain contours and transmission antenna EIRP contours are stated below:

1. Outbound uplink channels analysis (ground station to satellite):

|                                     |             |
|-------------------------------------|-------------|
| Ground station transmitting/channel | 12 dBW      |
| Ground station transmitter losses   | -0.7 dB     |
| G/T                                 | +16 dBi     |
| Max range (3500 km)                 | -146.6 dB   |
| G/T at 5 degree elevation angle     | +5 dBi      |
| Satellite receiver loss             | -2.5 dB     |
| Polarization loss                   | -3 dB       |
| To receiver                         | -201 dBW/Hz |
| 9600 bps                            | 39.82 dBHz  |
| C/No                                | 80.20 dBHz  |
| Eb/No                               | +4.5 dB     |
| Uplink Margin                       | > 30 dB     |

2. Outbound downlink channels analysis (satellite to users' terminals)

|   |                                   |
|---|-----------------------------------|
| Satellite transmitting/channel  | 9 dBW (7.95 watts)                |
| Satellite transmitter loss  | -0.7 dB                           |
| G/T at 60 degree off-axis   | +4 dBi                            |
| Max range (3500 km)   | -145.93 dB                        |
| G/T at 5 degree elev. angle   | +2.5 dB                           |
| Terminal receiver loss  | -2.5 dB                           |
| Polarization loss   | -3 dB                             |
| To receiver   | -200 dBW/Hz                       |
| 9600 bps  | 39.83 dBHz                        |
| Eb/No with coding   | +2.5 dB                           |
| Downlink margin   | +3 dB                             |
| Power flux density at the ground<br>(dBW/m <sup>2</sup> /4 KHz) (1300 km) | -141.50 dBW/m <sup>2</sup> /4 KHz |



### 3. Inbound uplink channels analysis (terminal to satellite)

|                                       |                  |
|---------------------------------------|------------------|
| Ground terminal                       | 0 dBW (1.0 watt) |
| Terminal transmission loss            | -0.7 dB          |
| G/T at 5 degree elev. angle           | +3 dBi           |
| Max range (3500 km)                   | -146.6 dB        |
| Satellite G/T at 60 deg. off-axis     | +4 dBi           |
| Receiver loss                         | -2.5 dB          |
| Multipath propagation effect          | -3 dB            |
| Polarization loss                     | -3 dB            |
| To satellite                          | -201 dBW/Hz      |
| 4800 bps                              | 36.82 dBHz       |
| Eb/No (10 <sup>-5</sup> ) with coding | +4.5 dB          |
| Uplink margin                         | +9.9 dB          |

### 4. Inbound downlink channels analysis (satellite to ground station)

|   |                                  |
|---|----------------------------------|
| Satellite transmitter/channel   | -3 dBW                           |
| Satellite transmission losses   | -0.7 dB                          |
| G/T at 60 degrees off-axis  | +4 dBi                           |
| Max range (3500 km)   | -145.93 dB                       |
| G/T   | +16 dBi                          |
| Ground station receiver loss  | -2.5 dB                          |
| Polarization loss   | -3 dB                            |
| To receiver   | -200 dBW/Hz                      |
| 4800 bps  | 36.83 dBHz                       |
| Eb/No (10 <sup>-5</sup> )   | +4.5 dB                          |
| Downlink margin   | +5.5 dB                          |
| Power flux density at the ground<br>in any 4 KHz band (dBW/m <sup>2</sup> /4 KHz) | -153.5 dBW/m <sup>2</sup> /4 KHz |

5. The communication system block diagram is shown in Figure 1.

### F. Physical Characteristics of STARNET Components

The STARNET component spacecraft will be designed to meet the following antenna pointing accuracy requirements:

|       |              |
|-------|--------------|
| Pitch | +/- 5°       |
| Roll  | +/- 5°       |
| Yaw   | not required |

The mission requires orientation of the antennas to approximate local vertical, with no requirement for yaw stability. A motorized boom provides the necessary inertia configuration for gravity-gradient stabilization. Energy dissipation for stability is provided by four passive magnetic hysteresis rods, one in each solar panel spar. Passive gravity-gradient stabilization such as this has been demonstrated on numerous spacecraft. Energy dissipation to assure stability will be provided by two passive ball-in-tube nutation dampers. Attitude knowledge is required to perform the maneuvers necessary for the stabilization adjustment phase. This is provided by a three-axis vector magnetometer and digital sun sensors. Magnetometer and sun sensor data are telemetered and ground processing enables attitude determination.

The STARNET component spacecraft will have a design lifetime of 5 years. Lifetime is determined by a number of factors including component failures, aging effects, and fuel depletion.

The power subsystem will have sufficient battery capacity to power the spacecraft during periods of solar eclipse lasting up to approximately 45 minutes. Details of the specific power subsystem design will be available when the spacecraft contractor has been selected during the competitive procurement phase.

#### G. Emission Limitations

Given the use of spread spectrum techniques and the fact that STARNET is a low earth orbit system, however, it is expected that the level of spurious emissions will be negligible. Applicant will minimize any spurious emission anomalies.

#### H. Dates by which construction will be commenced and completed, launch date, and estimated date of placement into service.

The complete constellation of twenty-four (24) STARNET in-orbit component spacecraft will be launched within forty-eight (48) months after Commission approval. Component spacecraft will be designed and quality controlled twelve (12) months after program inception. Delivery of STARNET component spacecraft will commence twenty-four (24) months after Commission approval. Manufacturers are to deliver three (3) component spacecraft per quarter over (8) quarters. Spacecraft integration on the launcher is four (4) months for the first launch, and one (1) month for subsequent launches.

Launches will be conducted at a rate of three (3) every quarter. The launch period will start in the fourth quarter of 1993 and continue into the third quarter of 1995, assuming Commission approval in the second quarter of 1991.

- I. The STARSYS application sets forth the public interest considerations, and the legal, financial, and technical qualifications of the Applicant. All information contained in the STARSYS application that is pertinent to this Application, but that may not be reproduced herein, is hereby incorporated by reference.
- J. STARSYS waives any claim to the use of any particular frequency or of the ether as against the regulatory power of the United States because of the previous use of the same, whether by license or otherwise, and requests construction authority in accordance with this Application. All statements made in the attached exhibits are a material part hereof, and are incorporated herein as if set out in full in this Application.
- K. The undersigned certifies for STARSYS that the statements made in this Application are true, complete, and correct to the best of his knowledge and belief, and are made in good faith.

WHEREFORE, STARSYS respectfully requests the Commission to grant this Application.

Respectfully submitted,

STARSYS, INC.

By: /S/ Ashok Kaveeshwar  
Dr. Ashok Kaveeshwar  
President


Date: May 4, 1990

**TABLE 1**

STARNET component spacecraft will operate on a Modified Primary Basis in the U.S. in the following VHF bands:

**Nominally using spread spectrum techniques (Solution A)**


|                           |     |    |           |
|---------------------------|-----|----|-----------|
| Earth to space (uplink)   | 148 | to | 149.0 MHz |
| Space to earth (downlink) | 137 | to | 138.0 MHz |

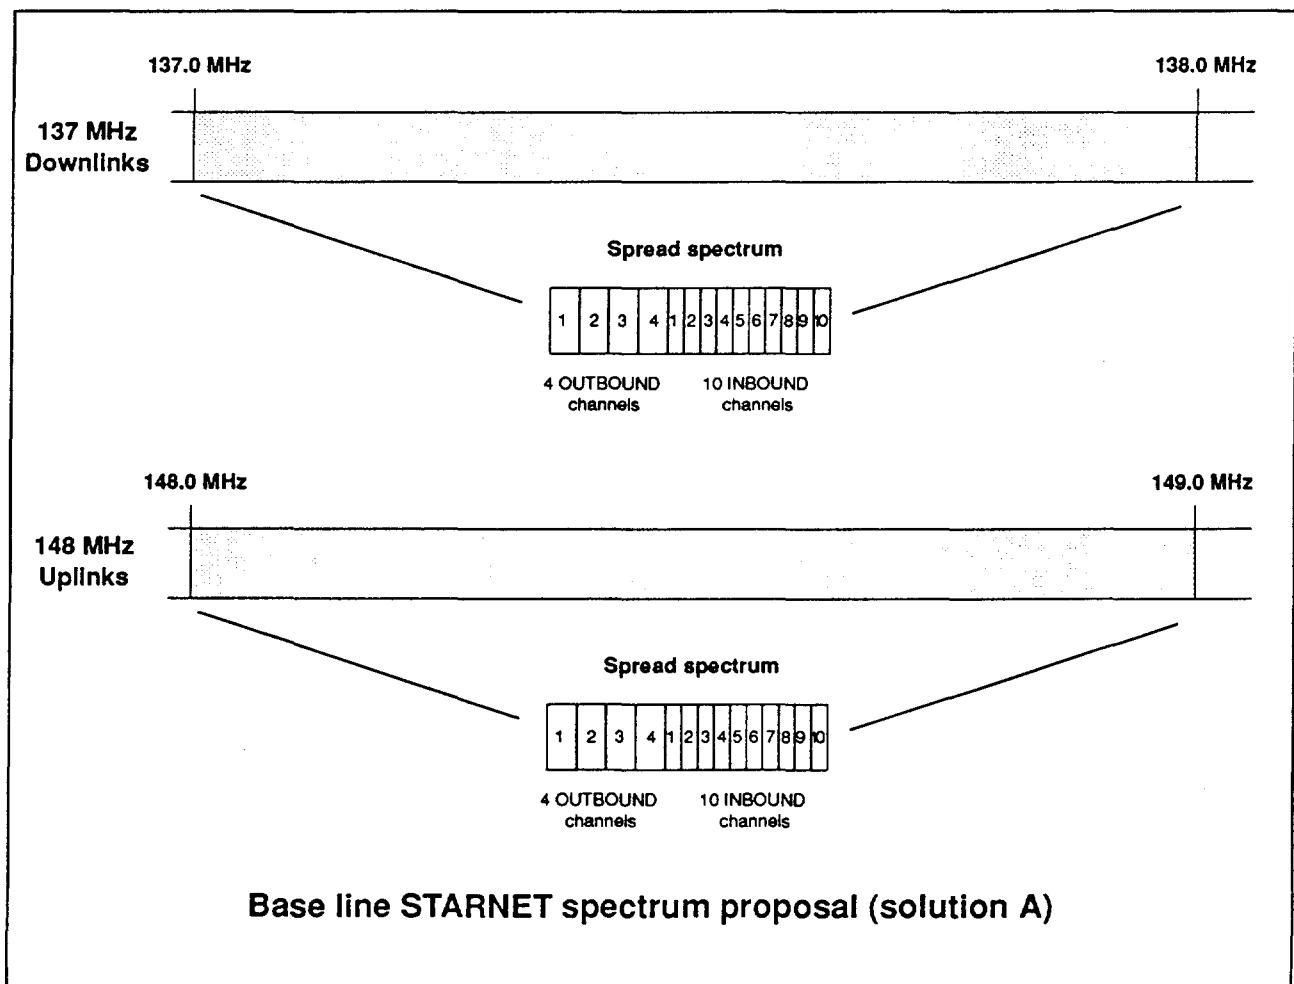

**TABLE 2**

**Or alternatively without using spread spectrum techniques  
(Solution B)**

|                           |     |    |             |
|---------------------------|-----|----|-------------|
| Earth to space (uplink)   | 148 | to | 148.411 MHz |
| Space to earth (downlink) | 137 | to | 137.509 MHz |

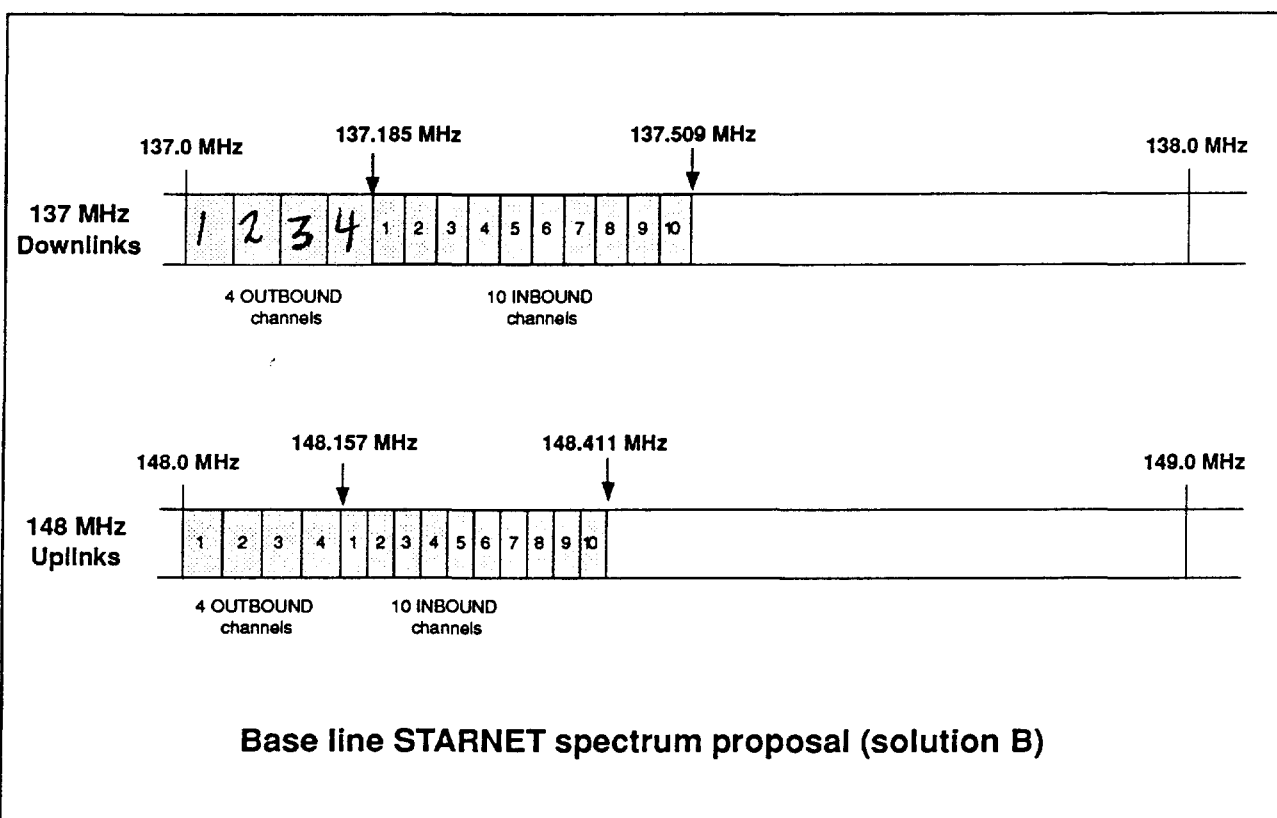

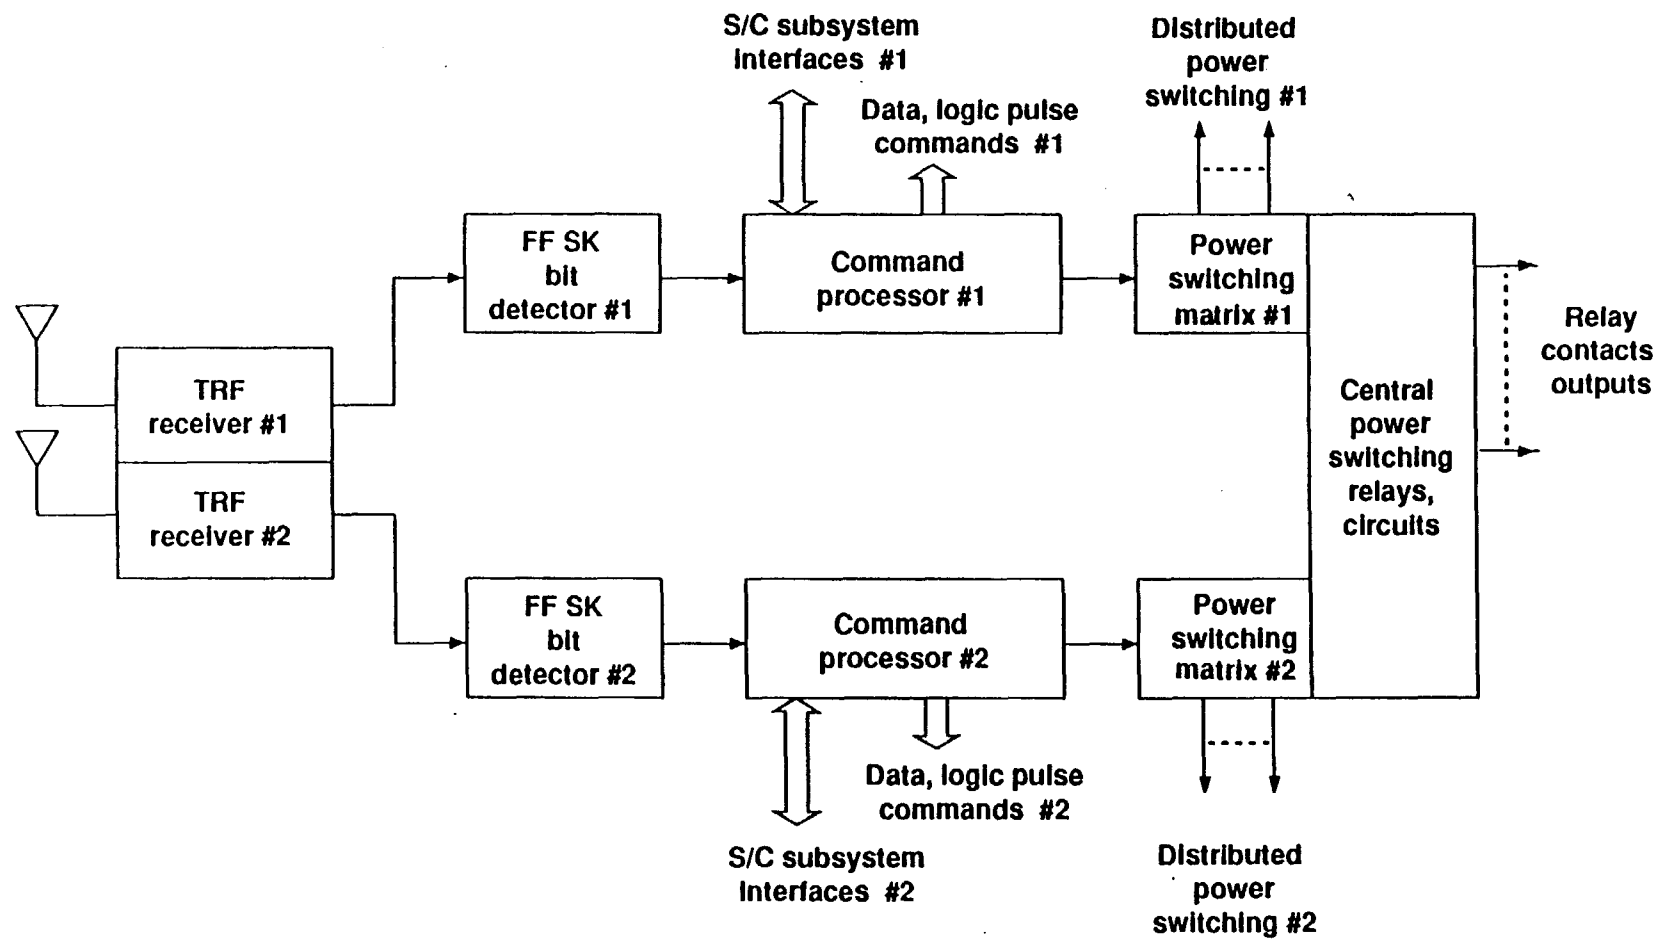


Figure 1

Before the  
FEDERAL COMMUNICATIONS COMMISSION  
Washington, D.C. 20554

In the Matter of the Application of )  
 )  
 STARSYS, INC. ) File No. \_\_\_\_\_  
 )  
 For Authority to Construct a Low Earth )  
 Orbit Communications Satellite to be )  
 Stationed in an Inclined )  
 Non-Geostationary Orbit )

## APPLICATION

STARSYS, Inc. ("STARSYS" or "Applicant"), pursuant to Sections 308, 309, and 319 of the Communications Act of 1934, as amended, hereby applies for authority to construct a low earth orbit communications satellite ("STARNET F7") that will operate in the 137-138 MHz frequency band for Space-to-Earth transmissions, and in the 148-149 MHz band for Earth-to-Space transmissions, or in sub-bands thereof, depending on frequency modulation selected by the Commission. STARSYS requests the Commission to allow STARNET F7 to be randomly deployed in a low earth, non-geostationary inclined orbit between 50 and 60 degrees.

The satellite for which construction authority is requested herein is an integral component of the STARNET system that is being developed by STARSYS. STARNET F7 is one of 24 in-orbit components of the STARNET system for which STARSYS is requesting Commission construction approval.

A. Applicant is:

STARSYS, Inc.  
2000 K Street, N.W.  
Suite 620  
Washington, D.C. 20006

B. Correspondence concerning this application may be addressed to:

Dr. Ashok Kaveeshwar  
President  
STARSYS, Inc.  
2000 K Street, N.W.  
Suite 620  
Washington, D.C. 20006

With a copy for Counsel:

Raul R. Rodriguez  
Stephen D. Baruch  
Leventhal, Senter & Lerman  
2000 K Street, N.W.  
Suite 600  
Washington, D.C. 20006-1809

C. The radio frequency plan is set forth in Tables 1 and 2.

TT&C frequency assignments are intraband.

VHF band frequencies (using spread spectrum techniques) are:

Earth-to-Space (Uplink) 148 to 149.0 MHz

Space-to-Earth (Downlink) 137 to 138.0 MHz

(In the event that a non-spread spectrum basis is selected by the Commission, the STARNET component spacecraft will operate in sub-bands of these frequencies.)



D. Applicant requests authority to deploy this component of the STARNET system in an inclined (between 50 degrees and 60 degrees), non-geostationary, low earth orbit. A discussion of the factors influencing the orbit selection process is included in Part VII of the STARSYS application.

E. The STARNET system component's receive antenna gain contours and transmission antenna EIRP contours are stated below:

1. Outbound uplink channels analysis (ground station to satellite):

|                                     |             |
|-------------------------------------|-------------|
| Ground station transmitting/channel | 12 dBW      |
| Ground station transmitter losses   | -0.7 dB     |
| G/T                                 | +16 dBi     |
| Max range (3500 km)                 | -146.6 dB   |
| G/T at 5 degree elevation angle     | +5 dBi      |
| Satellite receiver loss             | -2.5 dB     |
| Polarization loss                   | -3 dB       |
| To receiver                         | -201 dBW/Hz |
| 9600 bps                            | 39.82 dBHz  |
| C/No                                | 80.20 dBHz  |
| Eb/No                               | +4.5 dB     |
| Uplink Margin                       | > 30 dB     |

2. Outbound downlink channels analysis (satellite to users' terminals)

|   |                                   |
|---|-----------------------------------|
| Satellite transmitting/channel  | 9 dBW (7.95 watts)                |
| Satellite transmitter loss  | -0.7 dB                           |
| G/T at 60 degree off-axis   | +4 dBi                            |
| Max range (3500 km)   | -145.93 dB                        |
| G/T at 5 degree elev. angle   | +2.5 dB                           |
| Terminal receiver loss  | -2.5 dB                           |
| Polarization loss   | -3 dB                             |
| To receiver   | -200 dBW/Hz                       |
| 9600 bps  | 39.83 dBHz                        |
| Eb/No with coding   | +2.5 dB                           |
| Downlink margin   | +3 dB                             |
| Power flux density at the ground<br>(dBW/m <sup>2</sup> /4 KHz) (1300 km) | -141.50 dBW/m <sup>2</sup> /4 KHz |

### 3. Inbound uplink channels analysis (terminal to satellite)

|                                   |                  |
|-----------------------------------|------------------|
| Ground terminal                   | 0 dBW (1.0 watt) |
| Terminal transmission loss        | -0.7 dB          |
| G/T at 5 degree elev. angle       | +3 dBi           |
| Max range (3500 km)               | -146.6 dB        |
| Satellite G/T at 60 deg. off-axis | +4 dBi           |
| Receiver loss                     | -2.5 dB          |
| Multipath propagation effect      | -3 dB            |
| Polarization loss                 | -3 dB            |
| To satellite                      | -201 dBW/Hz      |
| 4800 bps                          | 36.82 dBHz       |
| Eb/No (10 -5) with coding         | +4.5 dB          |
| Uplink margin                     | +9.9 dB          |

### 4. Inbound downlink channels analysis (satellite to ground station)

|   |                                  |
|---|----------------------------------|
| Satellite transmitter/channel   | -3 dBW                           |
| Satellite transmission losses   | -0.7 dB                          |
| G/T at 60 degrees off-axis  | +4 dBi                           |
| Max range (3500 km)   | -145.93 dB                       |
| G/T   | +16 dBi                          |
| Ground station receiver loss  | -2.5 dB                          |
| Polarization loss   | -3 dB                            |
| To receiver   | -200 dBW/Hz                      |
| 4800 bps  | 36.83 dBHz                       |
| Eb/No (10 -5)   | +4.5 dB                          |
| Downlink margin   | +5.5 dB                          |
| Power flux density at the ground<br>in any 4 KHz band (dBW/m <sup>2</sup> /4 KHz) | -153.5 dBW/m <sup>2</sup> /4 KHz |

5. The communication system block diagram is shown in Figure 1.

### F. Physical Characteristics of STARNET Components

The STARNET component spacecraft will be designed to meet the following antenna pointing accuracy requirements:

|       |              |
|-------|--------------|
| Pitch | +/- 5°       |
| Roll  | +/- 5°       |
| Yaw   | not required |

The mission requires orientation of the antennas to approximate local vertical, with no requirement for yaw stability. A motorized boom provides the necessary inertia configuration for gravity-gradient stabilization. Energy dissipation for stability is provided by four passive magnetic hysteresis rods, one in each solar panel spar. Passive gravity-gradient stabilization such as this has been demonstrated on numerous spacecraft. Energy dissipation to assure stability will be provided by two passive ball-in-tube nutation dampers. Attitude knowledge is required to perform the maneuvers necessary for the stabilization adjustment phase. This is provided by a three-axis vector magnetometer and digital sun sensors. Magnetometer and sun sensor data are telemetered and ground processing enables attitude determination.

The STARNET component spacecraft will have a design lifetime of 5 years. Lifetime is determined by a number of factors including component failures, aging effects, and fuel depletion.

The power subsystem will have sufficient battery capacity to power the spacecraft during periods of solar eclipse lasting up to approximately 45 minutes. Details of the specific power subsystem design will be available when the spacecraft contractor has been selected during the competitive procurement phase.

#### G. Emission Limitations

Given the use of spread spectrum techniques and the fact that STARNET is a low earth orbit system, however, it is expected that the level of spurious emissions will be negligible. Applicant will minimize any spurious emission anomalies.

#### H. Dates by which construction will be commenced and completed, launch date, and estimated date of placement into service.

The complete constellation of twenty-four (24) STARNET in-orbit component spacecraft will be launched within forty-eight (48) months after Commission approval. Component spacecraft will be designed and quality controlled twelve (12) months after program inception. Delivery of STARNET component spacecraft will commence twenty-four (24) months after Commission approval. Manufacturers are to deliver three (3) component spacecraft per quarter over (8) quarters. Spacecraft integration on the launcher is four (4) months for the first launch, and one (1) month for subsequent launches.

Launches will be conducted at a rate of three (3) every quarter. The launch period will start in the fourth quarter of 1993 and continue into the third quarter of 1995, assuming Commission approval in the second quarter of 1991.

- I. The STARSYS application sets forth the public interest considerations, and the legal, financial, and technical qualifications of the Applicant. All information contained in the STARSYS application that is pertinent to this Application, but that may not be reproduced herein, is hereby incorporated by reference.
- J. STARSYS waives any claim to the use of any particular frequency or of the ether as against the regulatory power of the United States because of the previous use of the same, whether by license or otherwise, and requests construction authority in accordance with this Application. All statements made in the attached exhibits are a material part hereof, and are incorporated herein as if set out in full in this Application.
- K. The undersigned certifies for STARSYS that the statements made in this Application are true, complete, and correct to the best of his knowledge and belief, and are made in good faith.

WHEREFORE, STARSYS respectfully requests the Commission to grant this Application.

Respectfully submitted,

STARSYS, INC.

By: /S/ Ashok Kaveeshwar  
Dr. Ashok Kaveeshwar  
President


Date: May 4, 1990

**TABLE 1**

STARNET component spacecraft will operate on a Modified Primary Basis in the U.S. in the following VHF bands:

**Nominally using spread spectrum techniques (Solution A)**


|                           |     |    |           |
|---------------------------|-----|----|-----------|
| Earth to space (uplink)   | 148 | to | 149.0 MHz |
| Space to earth (downlink) | 137 | to | 138.0 MHz |

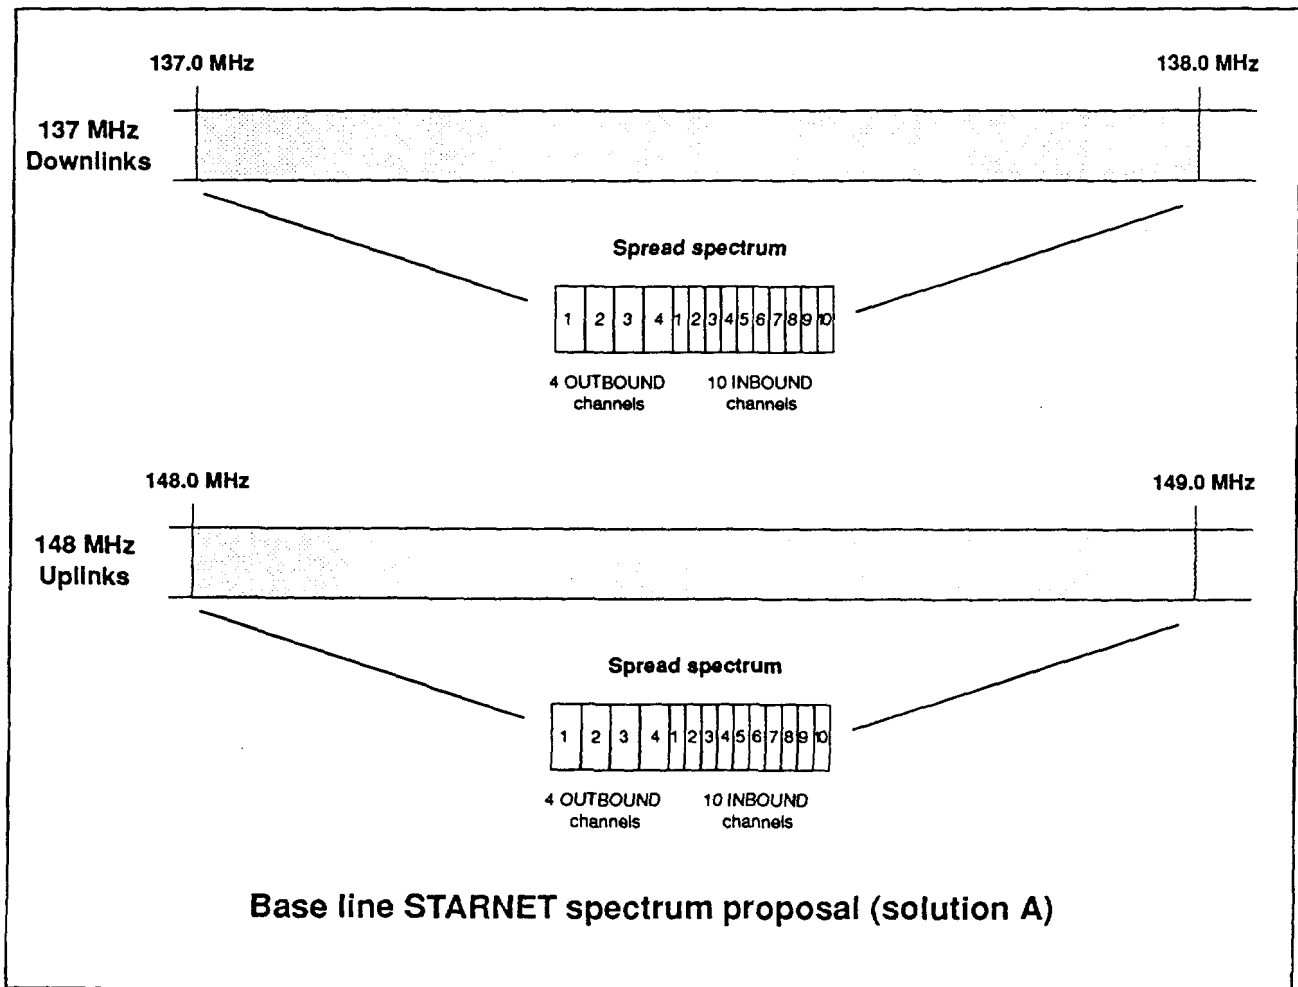

**TABLE 2**

**Or alternatively without using spread spectrum techniques  
(Solution B)**

|                           |     |    |             |
|---------------------------|-----|----|-------------|
| Earth to space (uplink)   | 148 | to | 148.411 MHz |
| Space to earth (downlink) | 137 | to | 137.509 MHz |

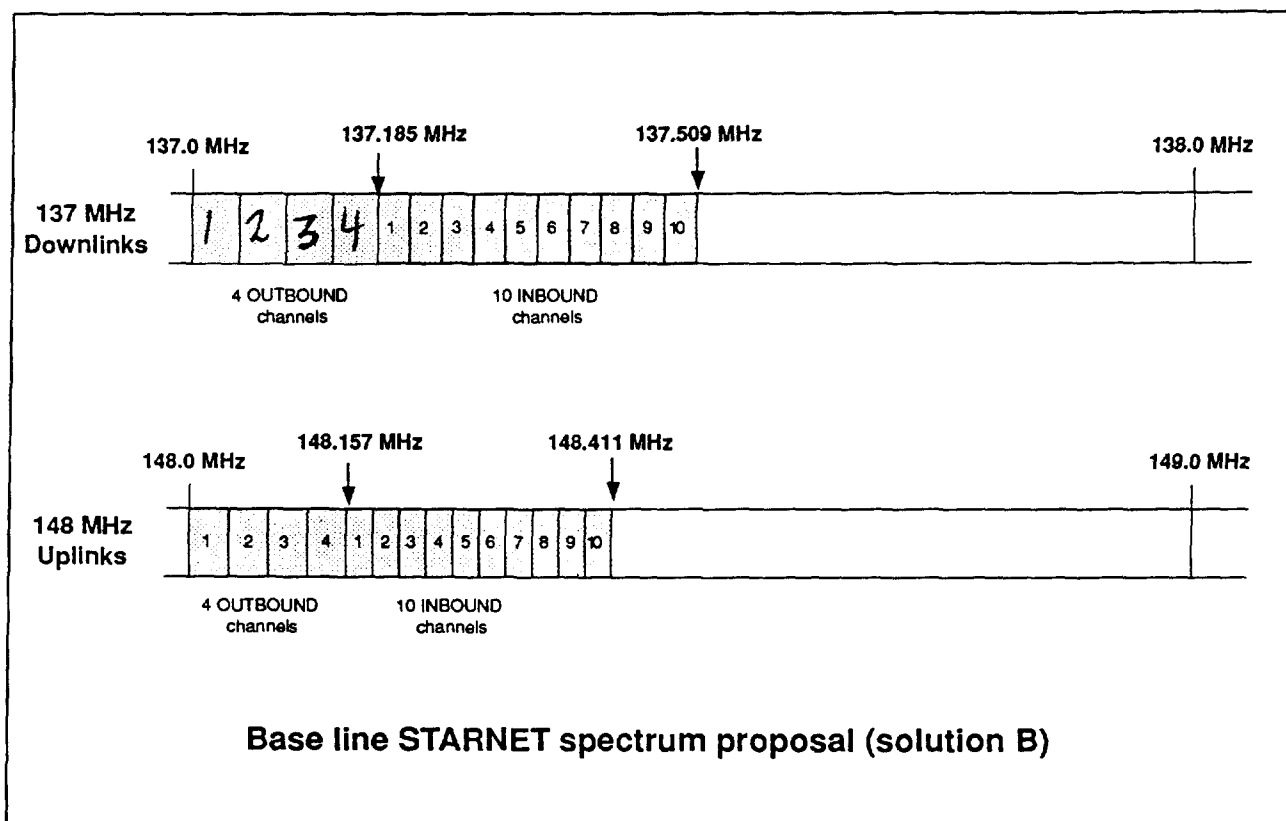

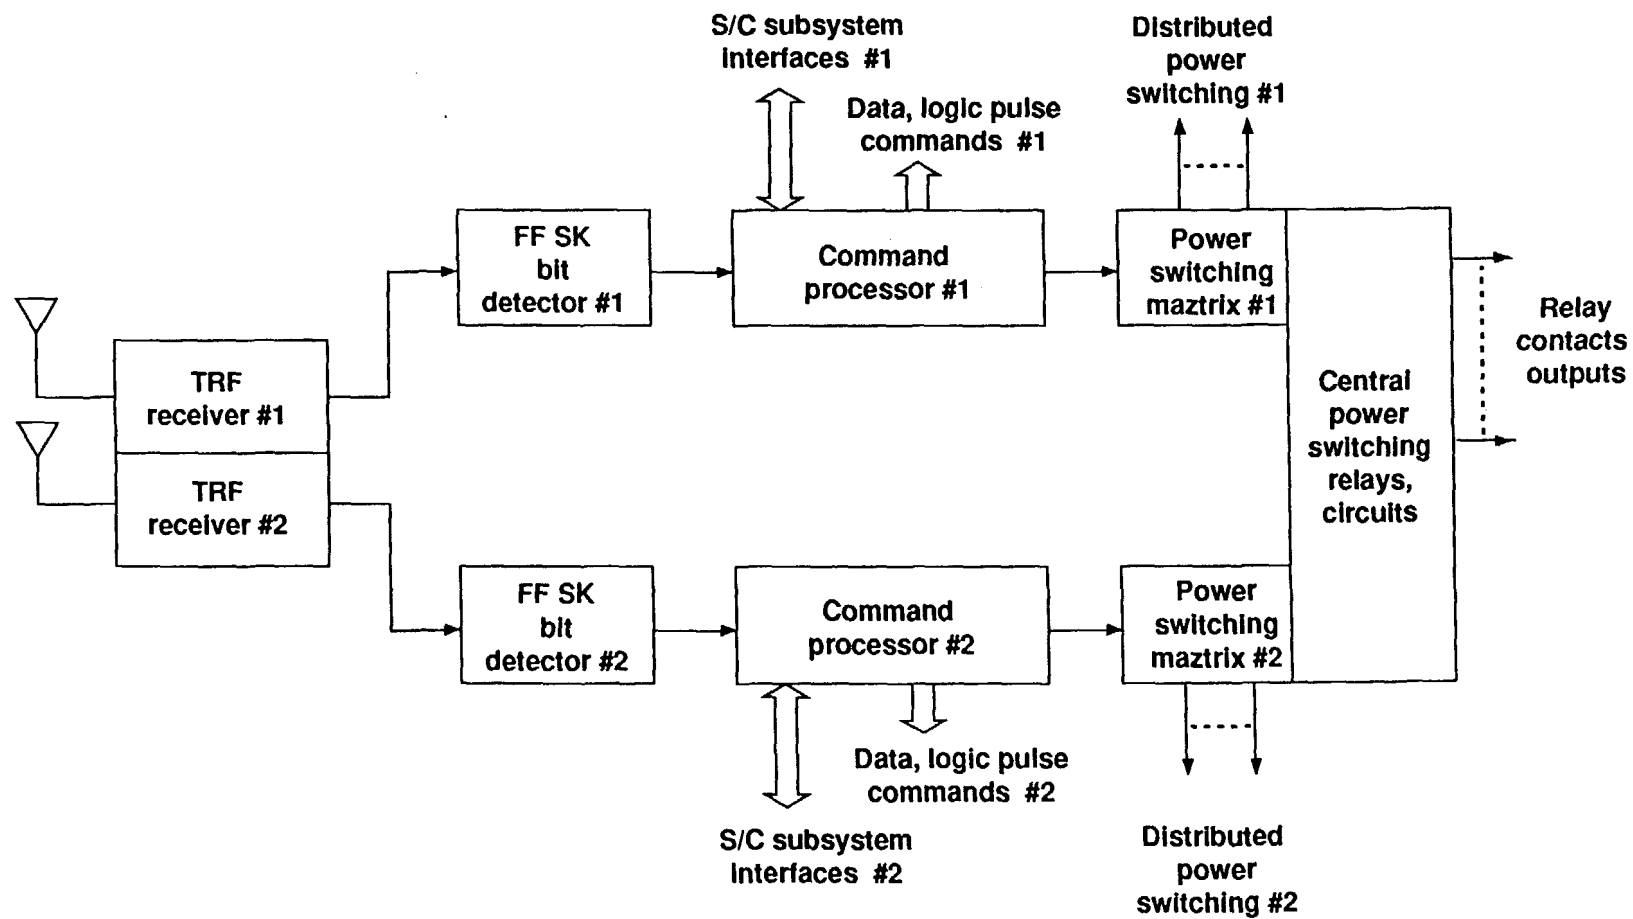


Figure 1

Before the  
FEDERAL COMMUNICATIONS COMMISSION  
Washington, D.C. 20554

|  |   |                |
|--|---|----------------|
| In the Matter of the Application of    | ) |                |
|  | ) |                |
| STARSYS, INC.                          | ) | File No. _____ |
|  | ) |                |
| For Authority to Construct a Low Earth | ) |                |
| Orbit Communications Satellite to be   | ) |                |
| Stationed in an Inclined               | ) |                |
| Non-Geostationary Orbit                | ) |                |

APPLICATION

STARSYS, Inc. ("STARSYS" or "Applicant"), pursuant to Sections 308, 309, and 319 of the Communications Act of 1934, as amended, hereby applies for authority to construct a low earth orbit communications satellite ("STARNET F8") that will operate in the 137-138 MHz frequency band for Space-to-Earth transmissions, and in the 148-149 MHz band for Earth-to-Space transmissions, or in sub-bands thereof, depending on frequency modulation selected by the Commission. STARSYS requests the Commission to allow STARNET F8 to be randomly deployed in a low earth, non-geostationary inclined orbit between 50 and 60 degrees.

The satellite for which construction authority is requested herein is an integral component of the STARNET system that is being developed by STARSYS. STARNET F8 is one of 24 in-orbit components of the STARNET system for which STARSYS is requesting Commission construction approval.



A. Applicant is:

STARSYS, Inc.  
2000 K Street, N.W.  
Suite 620  
Washington, D.C. 20006

B. Correspondence concerning this application may be addressed to:

Dr. Ashok Kaveeshwar  
President  
STARSYS, Inc.  
2000 K Street, N.W.  
Suite 620  
Washington, D.C. 20006

With a copy for Counsel:

Raul R. Rodriguez  
Stephen D. Baruch  
Leventhal, Senter & Lerman  
2000 K Street, N.W.  
Suite 600  
Washington, D.C. 20006-1809

C. The radio frequency plan is set forth in Tables 1 and 2.

TT&C frequency assignments are intraband.

VHF band frequencies (using spread spectrum techniques) are:

Earth-to-Space (Uplink) 148 to 149.0 MHz

Space-to-Earth (Downlink) 137 to 138.0 MHz

(In the event that a non-spread spectrum basis is selected by the Commission, the STARNET component spacecraft will operate in sub-bands of these frequencies.)